


WATER SOFTENERS: EASYSOFT CLASSIC

Dirty white edges around sink / bath taps, shower heads and toilets? Will cleaning not help with the problem? The Lubron EASYSOFT CLASSIC water softener does offer a solution.

With the EASYSOFT CLASSIC you will be treated to the comfort of soft water throughout your entire property, not only to the bathroom, but also to all toilets, sinks and shower heads. The installation of the EASYSOFT CLASSIC will result in gleaming taps and tiling in the kitchen and bathroom, this obviously saving a lot of time and effort with cleaning work!

Another important advantage is that expensive items such as your water heater, dishwasher, washing machine, electric shower, coffee machine, etc., will last much longer with the installation of a water softener. When adding up all of the benefits and comforts of soft water in your property the choice of an EASYSOFT CLASSIC is made very easy!



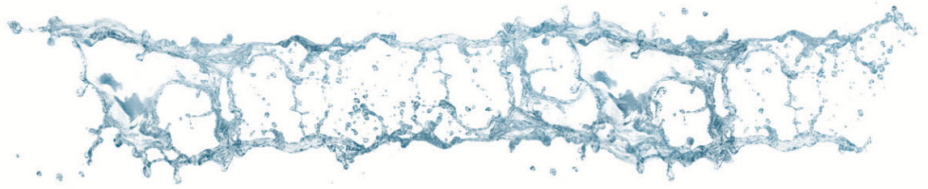

LAYOUT

The EASYSOFT CLASSIC houses both the resin tank and the salt container in a single cabinet. The softener is controlled by means of a resin tank-mounted patented control valve and includes an integrated valve to allow the required setting of residual hardness to be made. The regeneration of these water softeners is time based, with a 7 or 12-day disc available on the control valve.

- Less cleaning work, greater comfort.
- Extended life of electrical appliances.
- Compact built.
- Ease of operation.
- Cost saving due to less appliance energy consumption and the use of less cleaning products.
- Optional commissioning by a Lubron service technician for optimum performance.

PRODUCT SPECIFICATION

MODEL	Flow capacity l/h	Nominal capacity at 180ppm CaCO ₃		Salt consumption per regeneration		Pressure drop at flow capacity bar	Resin conten litres	Brine compartment capacity kg	Dimensions W x L x H (mm)
		Min (m ³)	Max (m ³)	Min (kg)	Max (kg)				
EASYSOFT 450 CLASSIC	450	2.0	3.4	0.8	1.9	0.1	9	25	262 x 463 x 630
EASYSOFT 750 CLASSIC	750	3.4	5.7	1.2	2.9	0.2	15	40	262 x 463 x 810
EASYSOFT 1100 CLASSIC	1100	5.0	8.4	1.8	5.5	0.2	22	60	331 x 583 x 810
EASYSOFT 1700 CLASSIC	1700	7.7	13.0	2.7	6.5	0.6	34	75	331 x 583 x 1090

Dimensions shown are for reference only. Contact Lubron for certified drawings.

TECHNICAL INFORMATION	Typical use
Water connections Water in 3/4" BSP male Water out 3/4" BSP male Drain 14 mm hose connector Allowable water temperature 5 - 40°C Allowable water pressure Min: 2.0 bar Max: 7.0 bar Electrical connections 230 V, 50 Hz	

LUBRON UK LIMITED reserve the right to change equipment specification without prior notice, as part of our continuous product development programme.



015



LUBRON UK LTD
 Lubron House
 8 Challenge Way, Hythe Hill
 Colchester, Essex CO1 2LY
 Tel: +44 (0)1206 866444
 www.lubron.co.uk