


WATER SOFTENERS: EASYSOFT SXT

Dirty white edges around sink / bath taps, shower heads and toilets? Will cleaning not help with the problem? The Lubron EASYSOFT SXT water softener does offer a solution.

With the EASYSOFT SXT you will be treated to the comfort of soft water throughout your entire property, not only to the bathroom, but also to all toilets, sinks and shower heads. The installation of the EASYSOFT SXT will result in gleaming taps and tiling in the kitchen and bathroom, this obviously saving a lot of time and effort with cleaning work!

Another important advantage is that expensive items such as your water heater, dishwasher, washing machine, electric shower, coffee machine, etc., will last much longer with the installation of a water softener. When adding up all of the benefits and comforts of soft water in your property the choice of an EASYSOFT SXT is made very easy!



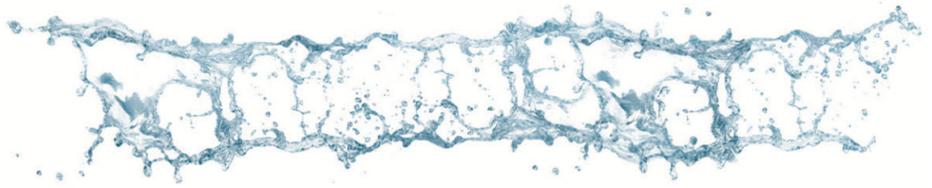

LAYOUT

Our EASYSOFT SXT water softeners house both the resin tank and the salt container in a small plastic cabinet. The softener is controlled by means of a resin tank-mounted patented control valve and includes an integrated valve to allow the required setting of residual hardness to be made. The regeneration of these water softeners can be performed in two different ways, on the basis of time (SXT version) and by volume (SXT2 version).

- Less cleaning work, greater comfort.
- Extended life of electrical appliances.
- Compact built.
- Ease of operation.
- Cost saving due to less appliance energy consumption and the use of less cleaning products.
- Rinse water economy through modern control technology.
- Optional commissioning by a Lubron service technician for optimum performance.

PRODUCT SPECIFICATION

MODEL *	Flow capacity l/h	Nominal capacity at 180ppm CaCO ₃		Salt consumption per regeneration		Pressure drop at flow capacity bar	Resin content litres	Brine compartment capacity kg	Dimensions W x L x H (mm)
		Min (m ³)	Max (m ³)	Min (kg)	Max (kg)				
EASYSOFT 450 SXT	450	2.0	3.4	0.7	1.9	0.1	9	25	262 x 463 x 640
EASYSOFT 750 SXT	750	3.4	5.7	1.2	2.9	0.2	15	40	262 x 463 x 820
EASYSOFT 1100 SXT	1100	5.0	8.4	1.8	5.5	0.2	22	60	331 x 583 x 820
EASYSOFT 1700 SXT	1700	7.7	13.0	2.7	6.5	0.6	34	75	331 x 583 x 1100

Dimensions shown are for reference only. Contact Lubron for certified drawings. * data relevant to SXT and SXT2-versions.

TECHNICAL INFORMATION

Water connections

Water in 3/4" BSP male

Water out 3/4" BSP male

Drain 14 mm hose connector

Allowable water temperature

5 - 40°C

Allowable water pressure


Min: 2.0 bar

Max: 7.0 bar

Electrical connections

230 V, 50 Hz

Typical use

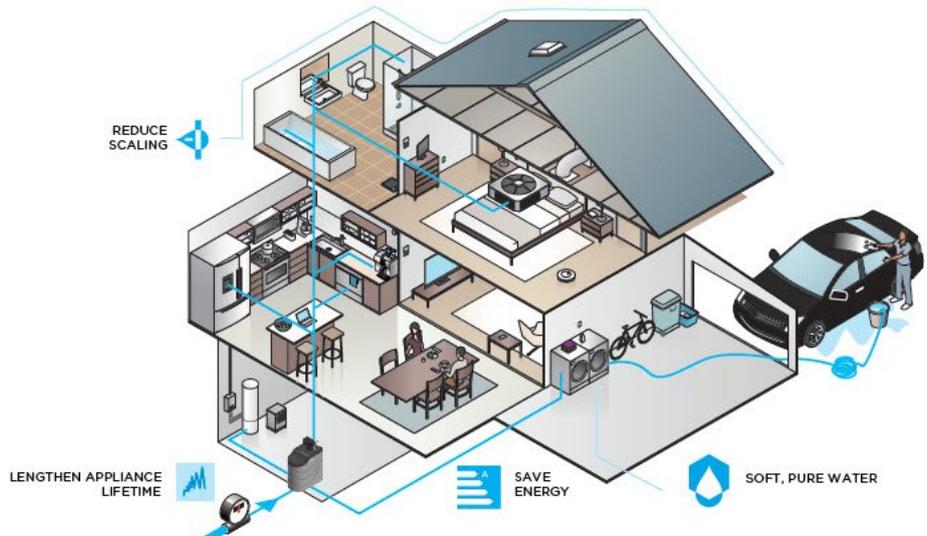

LUBRON UK LIMITED reserve the right to change equipment specification without prior notice, as part of our continuous product development programme.



015



LUBRON UK LTD

Lubron House
8 Challenge Way, Hythe Hill
Colchester, Essex CO1 2LY
Tel: +44 (0)1206 866444
www.lubron.co.uk