

## WATER SOFTENERS: PROLINE SXT

Lubron have been producing water softeners since 1978, with constant improvements to the range. A new addition to the range is the PROLINE SXT.


Development, design and construction of water softeners is undertaken totally inhouse in line with current European directives. Lubron is one of the leading water treatment providers in the Netherlands and is based in Oosterhout, Netherlands with subsidiary companies in England, Germany and Belgium.

This latest offering to the range features some very unique features that makes it ideal for protecting dishwashers, combi ovens and espresso machines against limescale.

The PROLINE SXT series has a capacity of 250 litres/hour and is housed in a wipe clean plastic cabinet.

Our team of consultants would be pleased to assist with your requirements, or alternatively visit our website at [www.lubron.co.uk](http://www.lubron.co.uk) for more information.



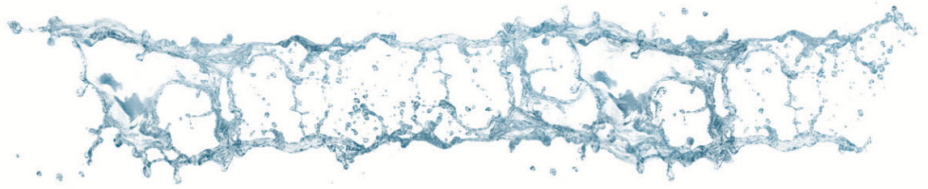

## PROLINE SXT, PERFECTION IN WATER SOFTENING

The PROLINE SXT water softener is specifically designed for the catering industry, where water plays an important role and the installation area can be limited. The PROLINE SXT is extremely compact and can therefore be placed easily under a standard load or unload table. The PROLINE SXT is also characterised by its unique, contemporary electronic control valve. This series is available in a timed version (SXT) or a volume controlled version (SXT2).

As with other softeners in our range, the PROLINE SXT series is very user-friendly and very economical.

### ADVANTAGES OF THE PROLINE SXT

- Very small and compact model.
- Optimal protection of appliances.
- Sustainable and environmentally friendly.

### PRODUCT RANGE

MODEL	Flow capacity l/h	Nominal capacity at 180ppm CaCO <sub>3</sub>		Salt consumption per regeneration		Pressure drop at flow capacity bar	Resin content litres	Brine compartment capacity kg	Dimensions W x L x H (mm)
		Min (m <sup>3</sup> )	Max (m <sup>3</sup> )	Min (kg)	Max (kg)				
PROLINE SXT	250	1.3	1.9	0.4	1.25	0.05	5	15	268 x 436 x 530
PROLINE SXT2	250	1.3	1.9	0.4	1.25	0.05	5	15	268 x 436 x 530

Dimensions shown are for reference only. Contact Lubron for certified drawings.

TECHNICAL INFORMATION	P and ID OF PROLINE SXT
<b>Water connections</b> Water in 3/4" BSP male Water out 3/4" BSP male Drain 14 mm hose connector	
<b>Allowable water temperature</b> 5 - 40°C	
<b>Allowable water pressure</b> Min: 2.0 bar Max: 7.0 bar	
<b>Electrical connections</b> 230 V, 50 Hz	
<b>Legend</b> 1. Backflow prevention device 2. Integrated mixing bypass	

LUBRON UK LIMITED reserve the right to change equipment specification without prior notice, as part of our continuous product development programme.



015



**LUBRON UK LTD**  
 Lubron House  
 8 Challenge Way, Hythe Hill  
 Colchester, Essex CO1 2LY  
 Tel: +44 (0)1206 866444  
 www.lubron.co.uk